

5.6GHz WiFi Coexistence BAW Filter

A10256

Description


Akoustis' A10256 is a high-performance, ultra-wide bandwidth BAW RF Filter for use in 5.6GHz WiFi applications covering U-NII-2C plus U-NII-3 bands. A10256 utilizes Akoustis' patented, XBAW™ technology to deliver differentiated filter performance. This BAW RF filter provides very low insertion loss and meets the stringent rejection requirements enabling coexistence with U-NII-1 and 2A. This device exhibits high-power handling capabilities necessary for demanding power requirements of the latest WiFi standards. A10256 uses standard laminate packaging and is compatible with high volume, lead-free SMT soldering processes.

- Ultra small form factor 2.5mm x 2.0mm x 1.1mm
- Single-ended Tx/Rx ports.
- Ultra-wide passband covering 345MHz
- High rejection enables coexistence with adjacent WiFi UNII bands
- High power rating, maximum +30dBm
- Low insertion loss passband filter
- Performance over -40 C to +85C
- RoHS compliant, Pb-free package

Applications

- WiFi tri band routers, integrated cable modem
- WiFi tri band access points
- LTE/LAA small cells

Functional Block Diagram

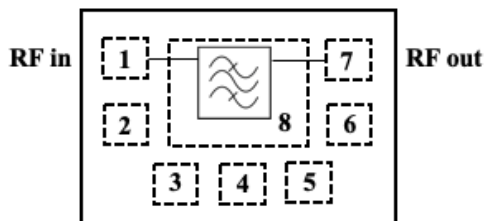

Pin #	Description
1	RF Input
2	Ground
3	Ground
4	Ground
5	Ground
6	Ground
7	RF Output
8	Ground

Ordering Information

Part Number	Description
A10256EVB	Evaluation board
A10256SP	(5) Loose pcs
A10256SR	(100) Short Reel (7" Reel)
A10256TR1	(1000) Tape & Reel (7" Reel)
A10256TR2	(2500) Tape & Reel (7" Reel)

Absolute Maximum Ratings

Parameter		Rating
Storage Temperature		-40 to 125 °C
Input Power	Signal: 802.11ax MCS10, 80 MHz, PAR 11dB Temp: 85°C	+31 dBm

A combination of AMR conditions may result in damage to the device.



Operating Parameters (Temp = -40°C to +85°C unless otherwise noted)

Parameter	Conditions	Units	Min.	Typ.	Max.
Pass bandwidth		MHz	5490	5665	5835
Insertion Loss	5490 – 5835 MHz	dB		1.6 ⁽¹⁾	2.3
Amplitude Variation	5490 – 5835 MHz (80MHz BW Channel)	dB		1.0	1.2
Attenuation	30 – 2100 MHz	dB	45	47	
	2400 – 2500 MHz	dB	38	40	
	3300 - 5000 MHz	dB	10	11	
	5170 – 5330 MHz	dB	50	52	
	5950 - 10000 MHz	dB	22	24	
	10000 - 12000 MHz	dB	40	41	
Return Loss	5490 – 5835 MHz		10	17 ⁽¹⁾	
Load Impedance		Ω		50	
Power Handling	802.11ax MCS10, 80 MHz, PAR 11dB	dBm			30
2 nd Harmonic	Po=28dBm (25°C)	dBm/MHz		-50	
3 rd Harmonic	Po=28dBm (25°C)	dBm/MHz		-92	

Note:

1. Averaged over specified frequency at room temperature

EVB Schematic & Layout

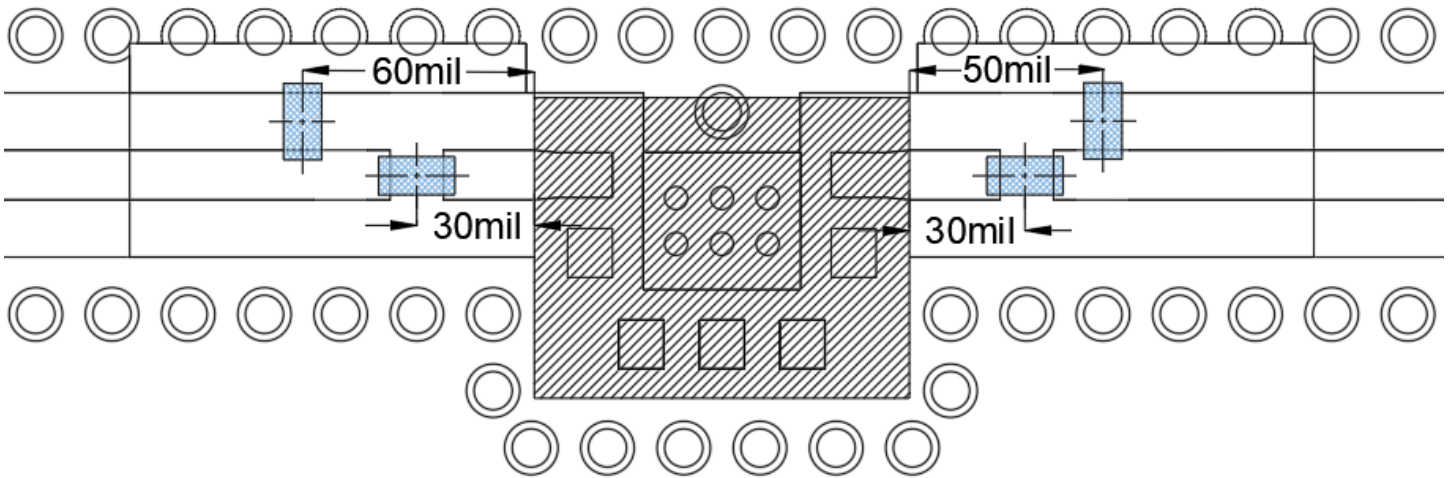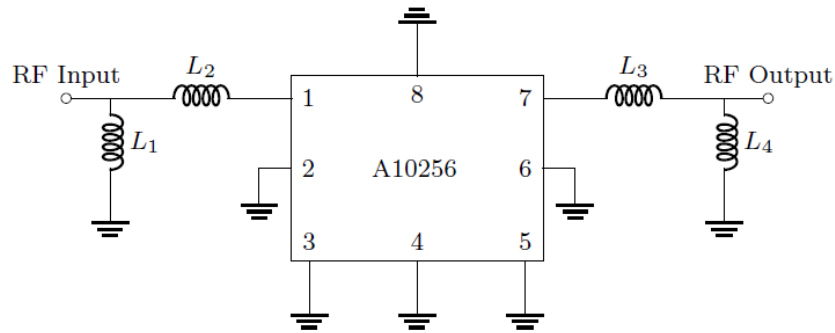






Note:

- 1) Center ground pad vias 6mil diameter
- 2) RF ground vias 10mil diameter

Bill of Materials

Reference Des.	Value	Description	Manufacturer	Part Number
PCB	N/A	3 layer	Multiple	
U1	N/A	5.6GHz Wi-Fi Filter	Akoustis	A10256
L1	1.1nH	Chip inductor, 0201, $\pm 0.05\text{nH}$	Murata	LQP03HQ1N1B02D
L2	0.3nH	Chip inductor, 0201, $\pm 0.05\text{nH}$	Murata	LQP03TG0N3B02D
L3	0.8nH	Chip inductor, 0201, $\pm 0.05\text{nH}$	Murata	LQP03HQ0N8B02D
L4	1.6nH	Chip inductor, 0201, $\pm 0.05\text{nH}$	Murata	LQP03HQ1N6B02D

Performance Plots

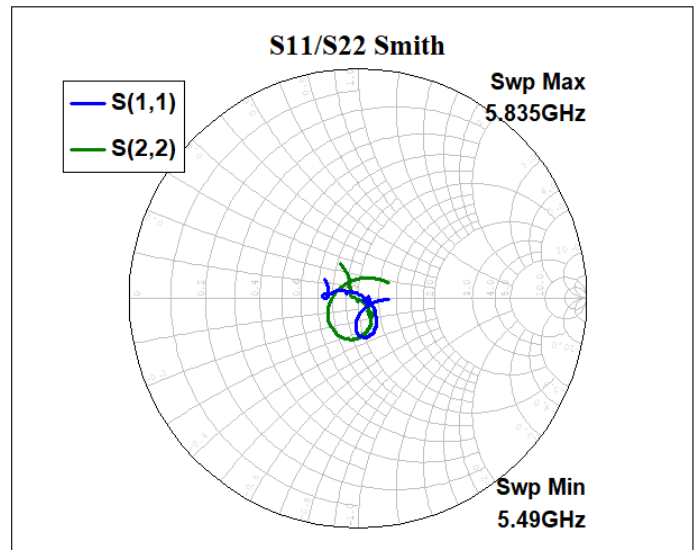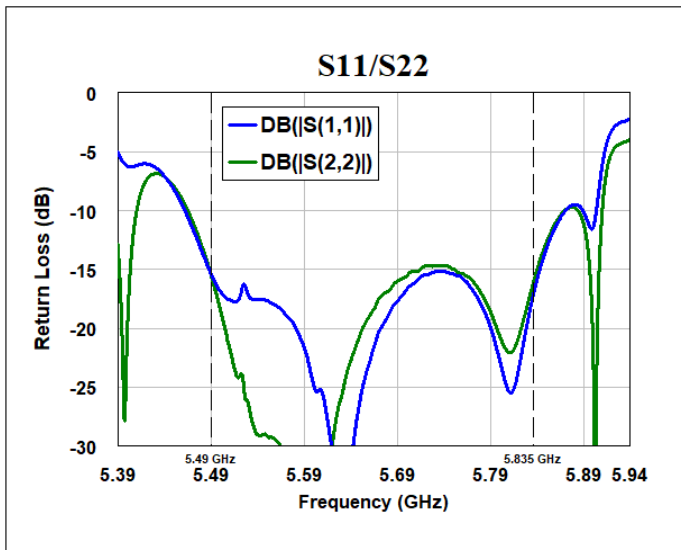
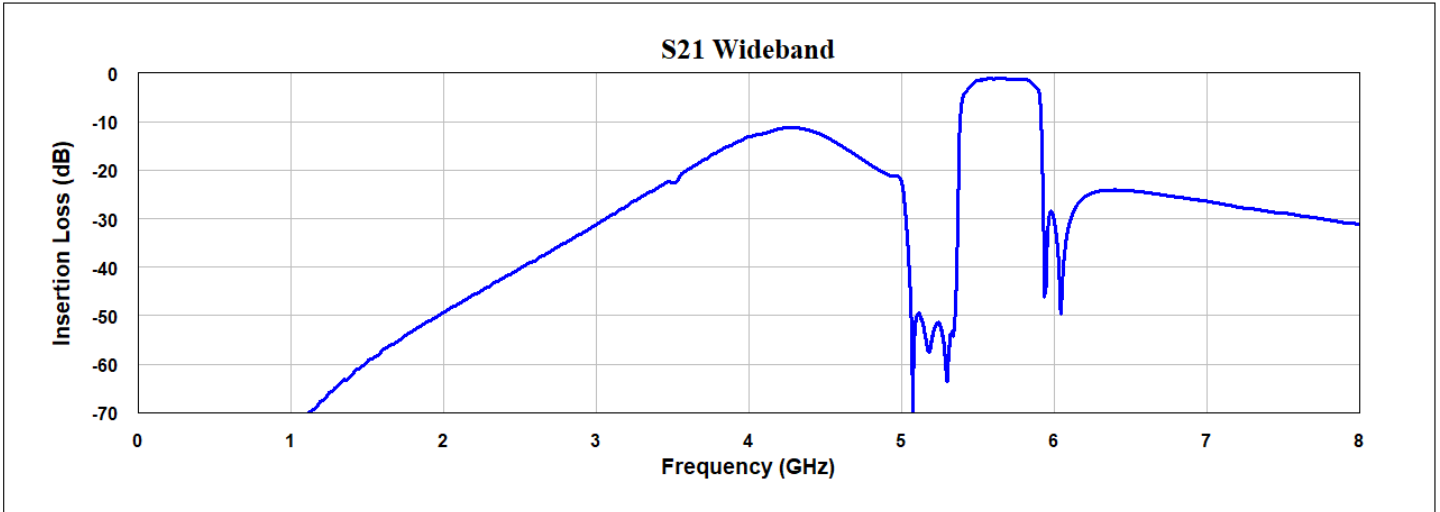
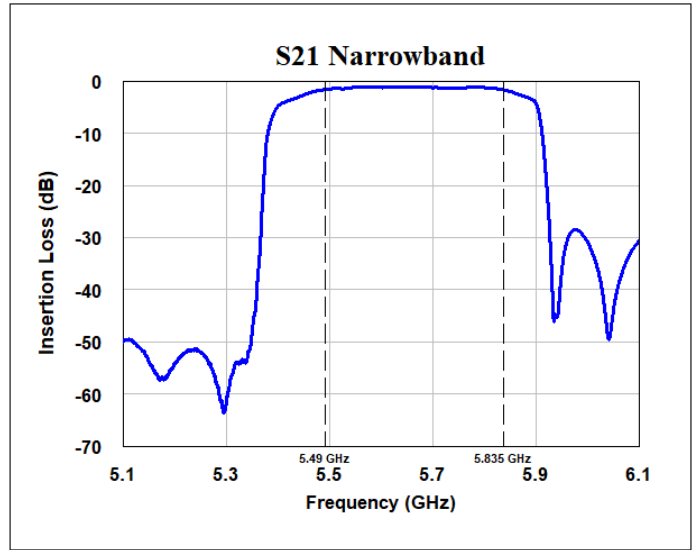
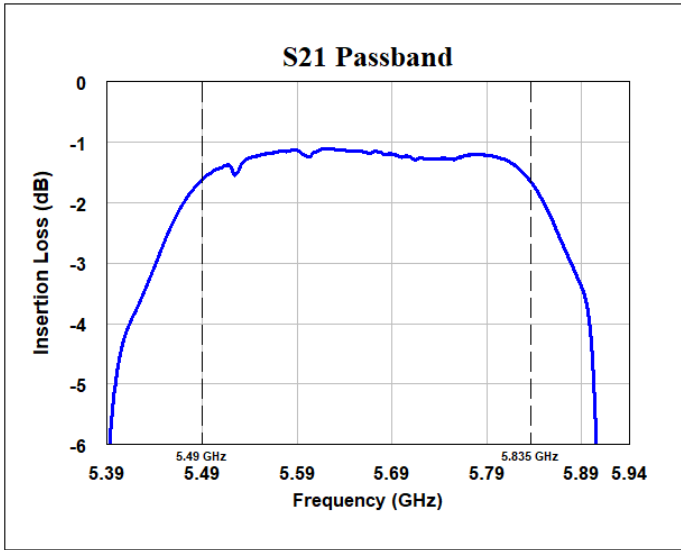


A10256

Package Drawing & Pin Description

Notes:

- All Units are in mm unless otherwise stated
- General Tolerance:
 Linear X.XXX = $\pm 0.050\text{mm}$
 X.XX = $\pm 0.10\text{mm}$

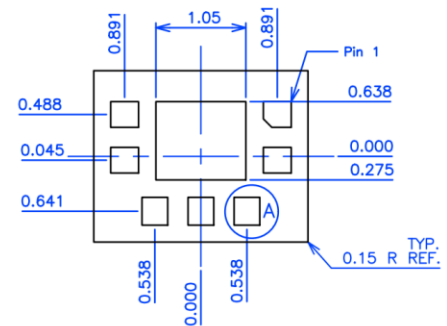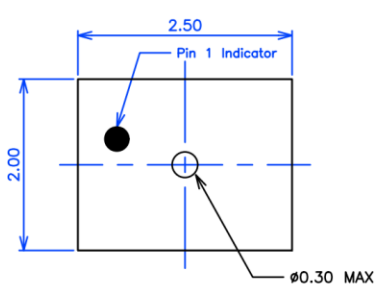

DETAIL A
 PAD
 SCALE: 2x
 3X THIS ROTATION
 4X ROTATED 90°
 PIN 1 CHAMFER 0.150 X 45°


NOTES:

1. Terminal Finish:
 Electroless Ni/Electroless Pd/Immersion Au


PCB Mounting Pattern

Notes:


- All Units are in mm unless otherwise stated
- General Tolerance:
 Linear X.XXX = $\pm 0.050\text{mm}$
 X.XX = $\pm 0.10\text{mm}$

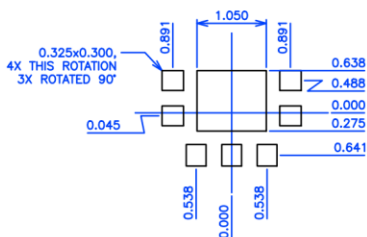

Recommended PCB
 Metal Top View

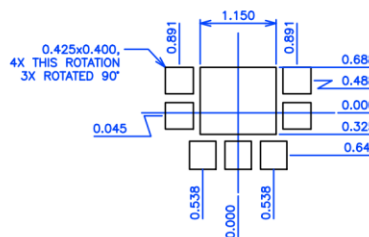


Recommended
 Solder Mask Opening
 Top View

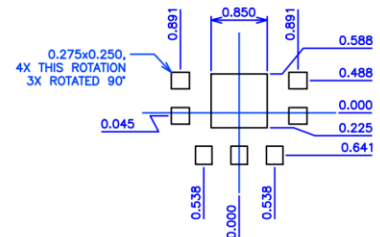


Recommended Stencil
 Pattern Top View

Typical Part Marking

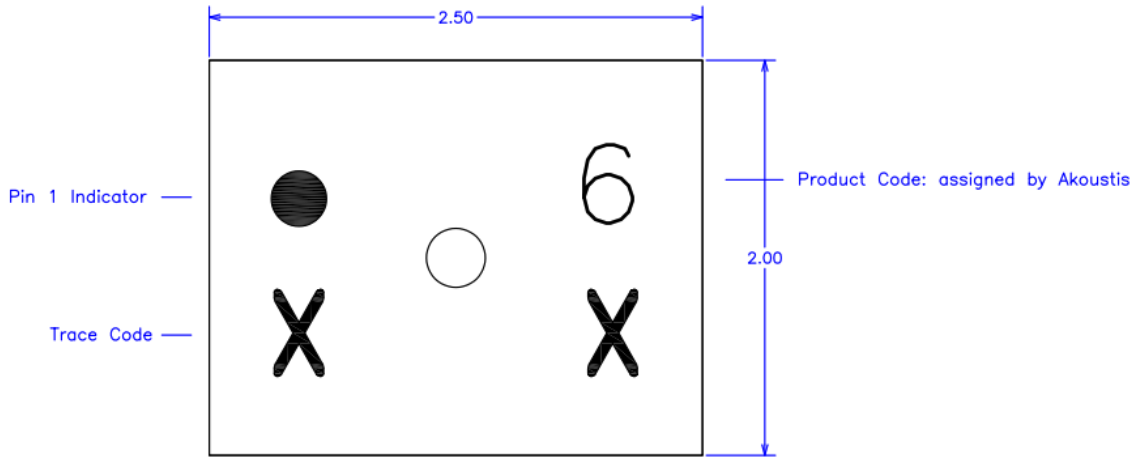

Reel Dimensions

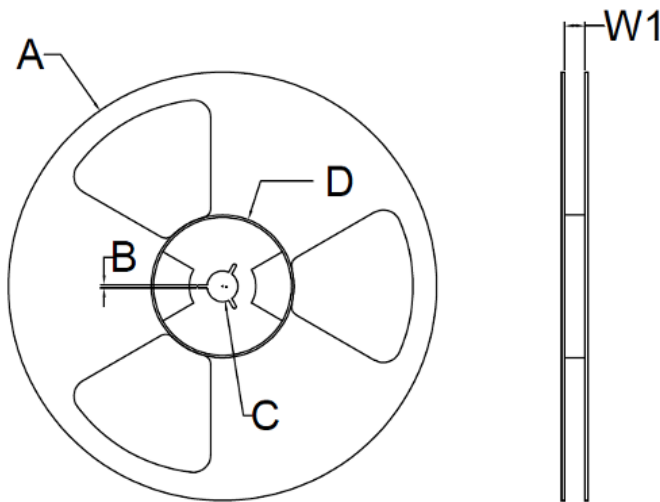


Reel Dimensions						
Reel Size	Tape Width	A	B	C	D	W1 *measured at hub
7 Inch	8 mm	180+0/-2.0 mm	2.0mm +/-0.5	13.0+0.5 / -0 mm	60.0 +/- 2.0 mm	8.40+1.5 / -0 mm
	12 mm	180+0/-2.0 mm	2.0mm +/-0.5	13.0+0.5 / -0 mm	60.0 +/- 2.0 mm	12.40+2.0 / -0 mm
	16 mm	180+0/-2.0 mm	2.0mm +/-0.5	13.0+0.5 / -0 mm	60.0 +/- 2.0 mm	16.40+2.0 / -0 mm
13 Inch	8 mm	330 +/- 2.0 mm	2.0mm +/-0.5	13.0+0.5 / -0.2 mm	102 +/- 2.0 mm	8.8+2.0 / -0 mm
	12 mm	330 +/- 2.0 mm	2.0mm +/-0.5	13.0+0.5 / -0.2 mm	102 +/- 2.0 mm	12.8+2.0 / -0 mm
	16 mm	330 +/- 2.0 mm	2.0mm +/-0.5	13.0+0.5 / -0.2 mm	102 +/- 2.0 mm	16.8+2.0 / -0 mm

Note: 7 Inch Reel Only Has One Opening


Tape Dimension

$A_0 = 2.25$
 $B_0 = 2.70$
 $K_0 = 1.20$

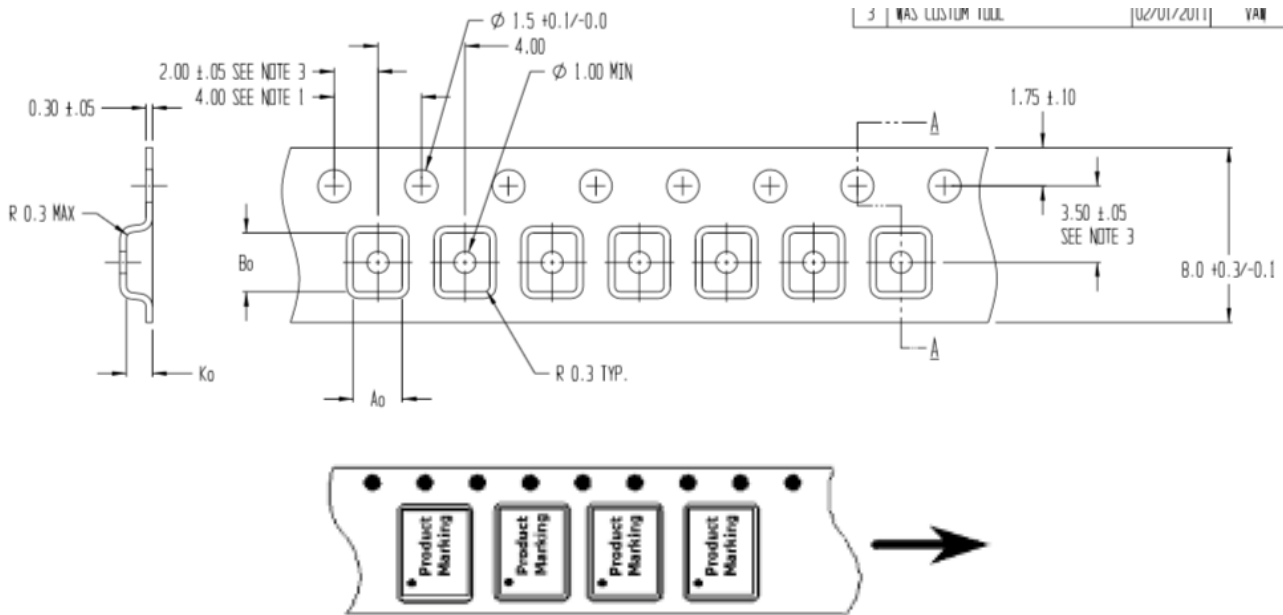

Recommended Solder Profile

Parameter	Eutectic Sn/Pb	Pb Free
Max Ramp Up Rate	6 Deg C/Second	6 Deg C/Second
Soak Temp Time $T_S(\text{min}) - T_S(\text{max})$	135 - 155 Deg C	150-200 Deg C
Max Soak Time T_S	2 minutes	3 minutes
Liquidous Temp T_L	183 Deg C	220 Deg C
Max Time Above T_L	150 Seconds	150 Seconds
Max Peak Temperature T_P	225 Deg C	260 Deg C
Max Time at Peak T_P	30 Seconds	30 Seconds
Max Ramp Down Rate	10 Deg C/Second	10 Deg C/Second

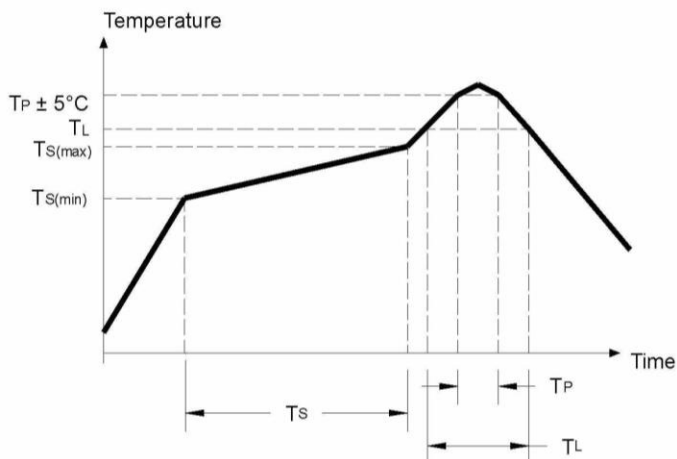

A10256

Product Compliance Information

ESD Sensitivity Ratings

Human Body Model (HBM) Test

Rating: 500

Standard: ANSI/ESDA/JEDEC JS-001-2017

Charged Device Model (CDM)

Rating: 1000

Standard: ANSI/ESDA/JEDEC JS-002-2018

MSL Rating

MSL1

RoHS

This part is compliant with the 2011/65EU RoHS directive on the restrictions of the use of certain hazardous substances in electrical and electronic equipment as amended by Directive (EU) 2015/863

Contact Information

All contents specified in datasheet are subject to change. Please contact Akoustis for the latest on our products and company information.

Email: sales@akoustis.com

Website: www.akoustis.com

Telephone: +1 704.997.5735

Fax: +1 704.997.5734