


- **High Performance Crystal for Wide Temperature Applications**
- **Excellent Frequency Stability and Reliability**
- **Ultra-miniature Surface Mount Seam Weld Package**
- **Complies with Directive 2002/95/EC (RoHS)**
- **Moisture Sensitivity Level: 1**

**XTL1030**

**24.3050 MHz  
Crystal Unit**

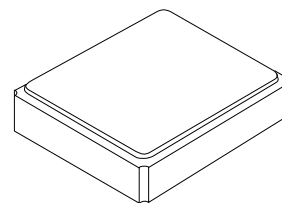


**SM3225-4 Case**

The XTL1030 is a high performance 24.3050 MHz crystal suitable for TPMS and other wide temperature range applications.

#### Electrical Characteristics

Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units
Nominal Frequency	$f_o$			24.3050		MHz
Mode of Oscillation			Fundamental			
Storage Temperature Range in Tape and Reel			-40		+85	°C
Component Storage Temperature Range			-40		+125	°C
Component Operating Temperature Range			-40		+125	°C
Frequency Make Tolerance	$f_L$		$\pm 30$ ppm @ 25 °C $\pm 3$ °C			
Frequency Stability over Operating Temperature Range			$\pm 50$ ppm (referenced to the value at 25 °C)			
Equivalent Series Resistance	ESR				110	$\Omega$
Motional Capacitance	$C_M$			3.0		fF
Shunt Capacitance	$C_O$			1.5		pF
Nominal Drive Level					50	$\mu$ W
Load Capacitance	$C_L$			7		pF
Aging, 25 °C					$\pm 1.0$	ppm/yr
Insulation Resistance, 100 VDC			500			M $\Omega$
Standard Shipping Quantity on 178 mm (7") Reel				3000		units
Lid Symbolization (Y = year, WW = week, S = shift)			1030 <u>Y</u> <u>W</u> <u>W</u> <u>S</u>			

Crystal Equivalent Circuit

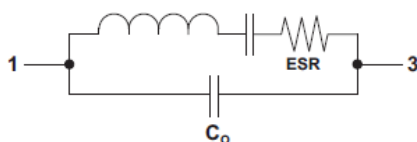

**CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.**


#### NOTES:

1. The design, manufacturing process, and specifications of this device are subject to change.
2. US or International patents may apply.
3. RoHS compliant from the first date of manufacture.

# SM3225-4 Case


## 4 Terminal Surface Mount Seam Weld Case

3.2 x 2.5 mm Nominal Footprint

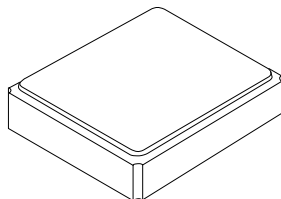

### Electrical Connections

Connection	Terminals
Input / Output	1
Ground	2
Input / Output	3
Ground	4

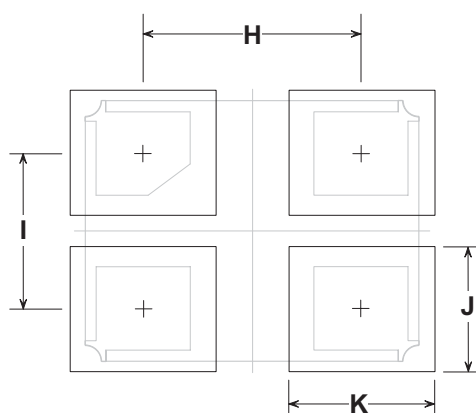


Typical PCB Land Footprint  
(Top View)

### Case and PCB Land Dimensions

Dimensions	Millimeters			Inches		
	Min	Nom	Max	Min	Nom	Max
A	3.10	3.20	3.30	0.122	0.126	0.130
B	2.40	2.50	2.60	0.094	0.098	0.102
C			0.70			0.028
D		2.10			0.083	
E		1.50			0.059	
F		0.80			0.031	
G		0.90			0.035	
H		2.10			0.083	
I		1.50			0.059	
J		1.20			0.047	
K		1.40			0.055	


### Case Outline Drawing

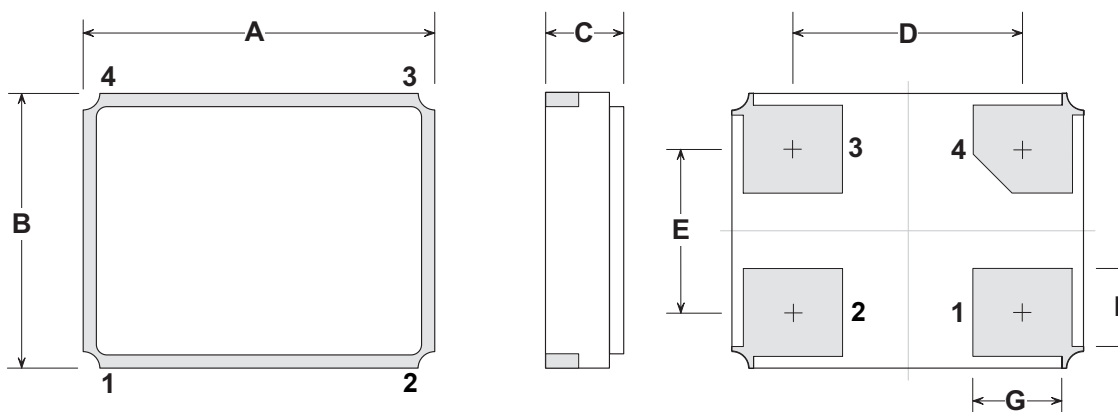

### Marking:



Y = Year, WW = Week, S = Shift

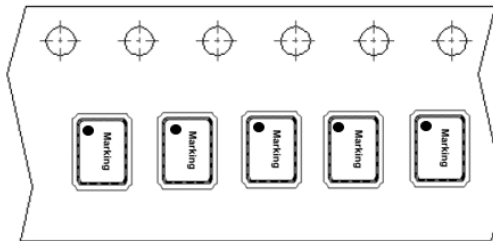


## Reel Dimensions


Reel Count:

$$7'' = 1000$$
$$13'' = 3000$$

Tape and Reel Standard per ANSI/EIA-481

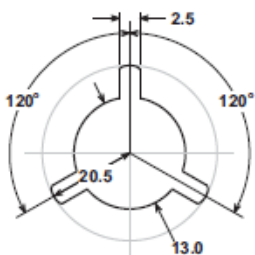


### Reel Hub Detail

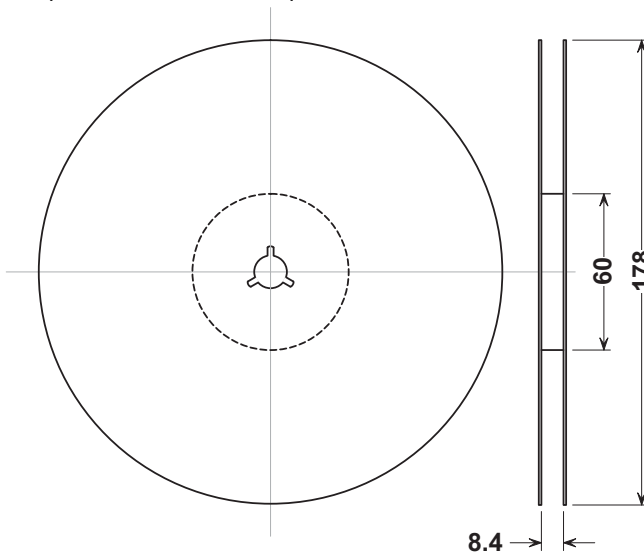

**Dimensions in mm**

## Tape Dimensions

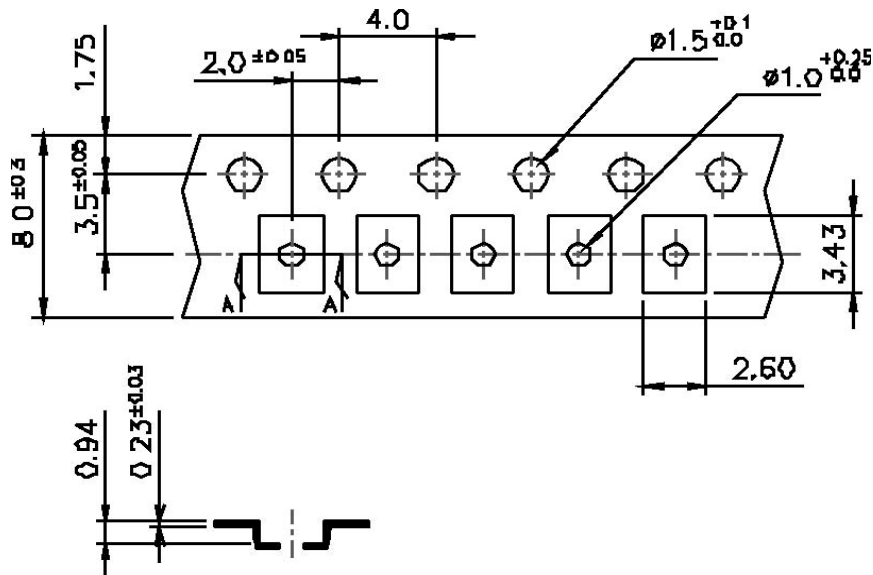

SECTION "A-A"

## Recommended Reflow Profile

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C +0/-5°C peak (10 seconds).
4. Time: 5 times maximum.

