


MAXIMUM RATING:

- Operating temperature range: -40 °C to +85 °C
- Storage temperature range: -55 °C to +125 °C
- Tx Input power : 29dBm (Ta=+50°C,50000h) 3.1Rx Input power : 15dBm (Ta=+50°C,50kh,CW)
- Maximum DC Voltage: +/-3 V
- Moisture Sensitivity Level: Level 1 (MSL 1)
- ESD 100V(MM) 200V(HBM)
- AEC-Q200 Qualified

**707.5/737.5 MHz
Filter Duplexer**



SM1814

ELECTRICAL CHARACTERISTICS:

Terminating impedance (Tx Port): 50 Ω (Single-ended)

Terminating impedance (Rx Port): 50 Ω (Single-ended)

Terminating impedance (Ant Port): 50//12nH Ω (Single-ended)

Tx to ANT (f_{T0}=707.5 MHz)

Parameters Description		Unit	Min	Typ	Max	Remarks
Insertion Loss(*1)	699~716MHz	dB	-	1.65	2.35	
Amplitude ripple	699~716MHz	dB	-	0.8	1.5	
VSWR	ANT	-	-	1.8	2.1	
	Tx	-	-	1.9	2.2	
Attenuation:						
729 ~ 746 MHz		dB	45	54	-	
746 ~ 768 MHz		dB	30	46	-	
768 ~ 805 MHz		dB	25	41	-	
869 ~ 894 MHz		dB	35	44	-	
1398 ~ 1432 MHz		dB	30	46		
1559 ~ 1606 MHz		dB	40	46	-	
2097 ~ 2155 MHz		dB	35	43	-	
2400 ~ 2484 MHz		dB	30	55	-	
2796 ~ 2864 MHz		dB	15	41	-	
4900 ~ 5850 MHz		dB	5	12		

ANT to Rx ($f_{T0}=737.5$ MHz)

Parameters Description			Unit	Min	Typ	Max	Remarks
Insertion Loss		729 ~ 746 MHz	dB	-	1.65	2.35	
Amplitude ripple		729 ~ 746 MHz	dB	-	0.5	1.5	
VSWR	ANT	729 ~ 746 MHz	-		1.6	2.0	
	Rx		-		1.9	2.2	
Attenuation:							
699 ~ 716 MHz			dB	55	62	-	
776 ~ 805 MHz			dB	35	40	-	
814 ~ 960 MHz			dB	40	55		
1710 ~ 1755 MHz			dB	40	54		
1850 ~ 1920 MHz			dB	40	52	-	
2187 ~ 2238 MHz			dB	40	51	-	
2400 ~ 2500 MHz			dB	40	49		
4900 ~ 5950 MHz			dB	35	46		

Tx to Rx

Isolation	699 ~ 716 MHz	dB	60	63	-	
	729 ~ 746 MHz	dB	55	58	-	

(*1) Specification of insertion loss excludes loss that comes from the test board.




CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.


NOTES:

1. The design, manufacturing process, and specifications of this device are subject to change.
2. US or International patents may apply.
3. RoHS compliant from the first date of manufacture.

FREQUENCY CHARACTERISTICS: Tx to Ant

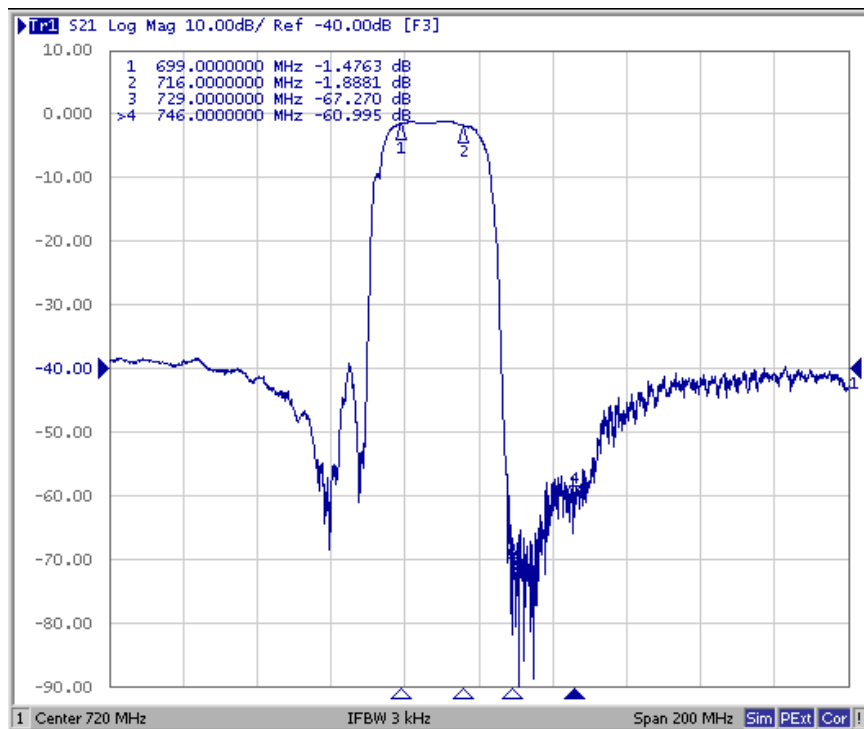


Ant to Rx

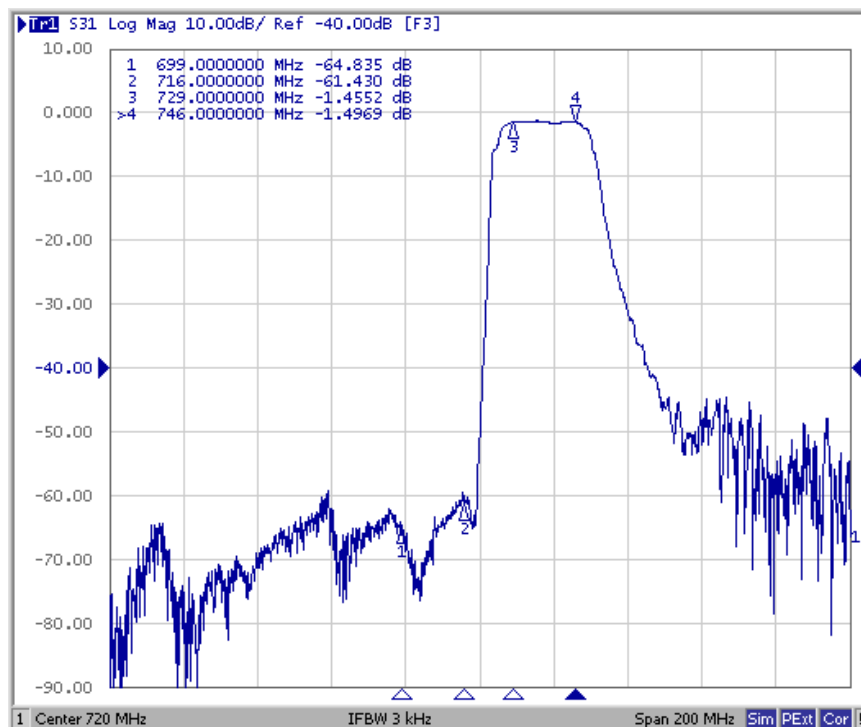


These data exclude loss that comes from the test board

Tx to Ant, Ant to Rx


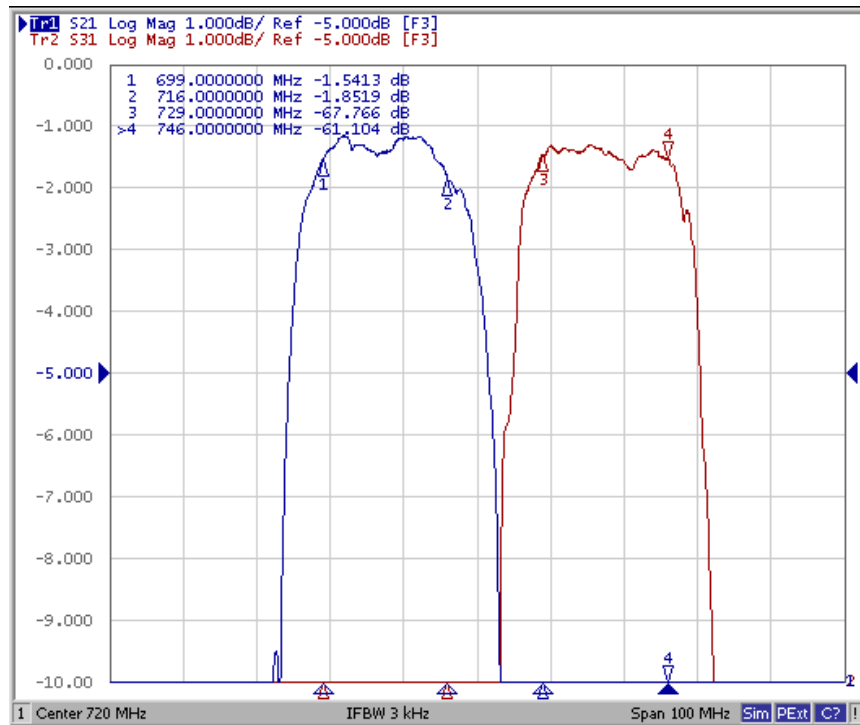


Tx to Rx Isolation


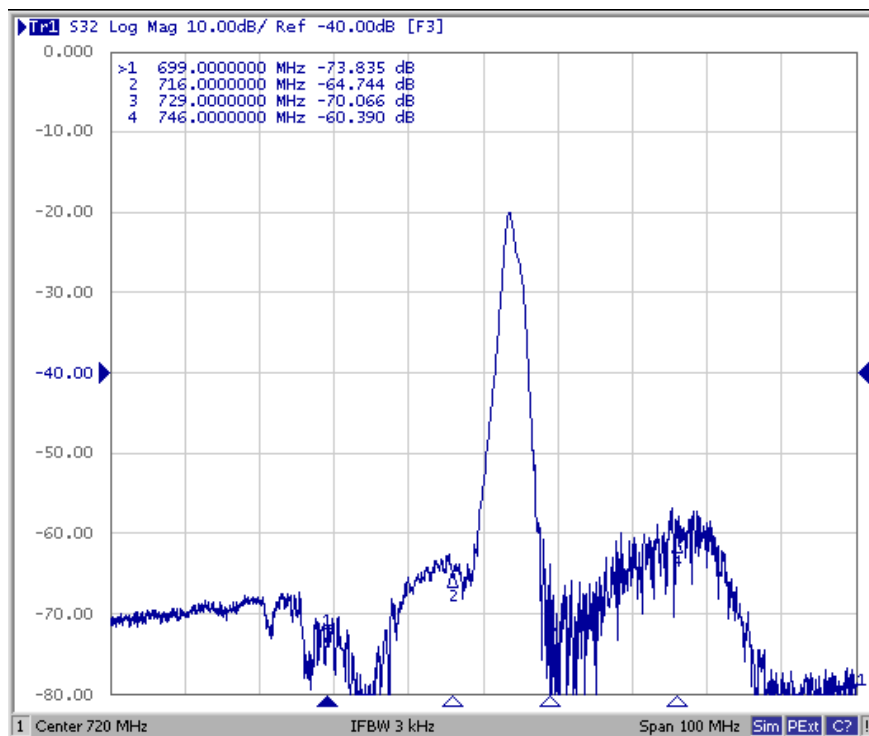


These data exclude loss that comes from the test board.



Tx Port

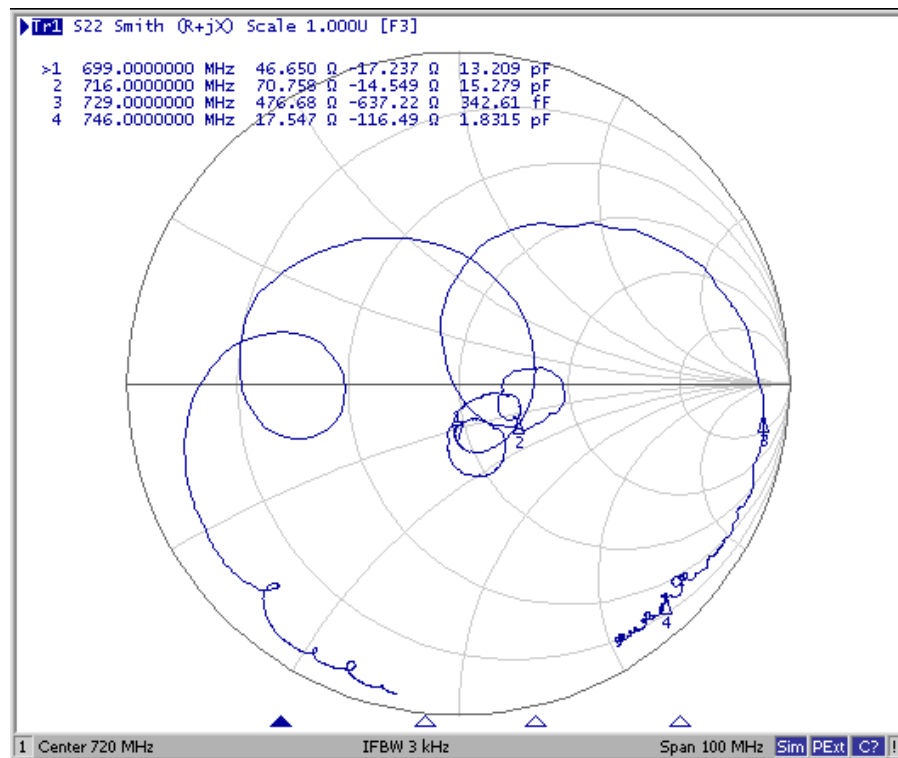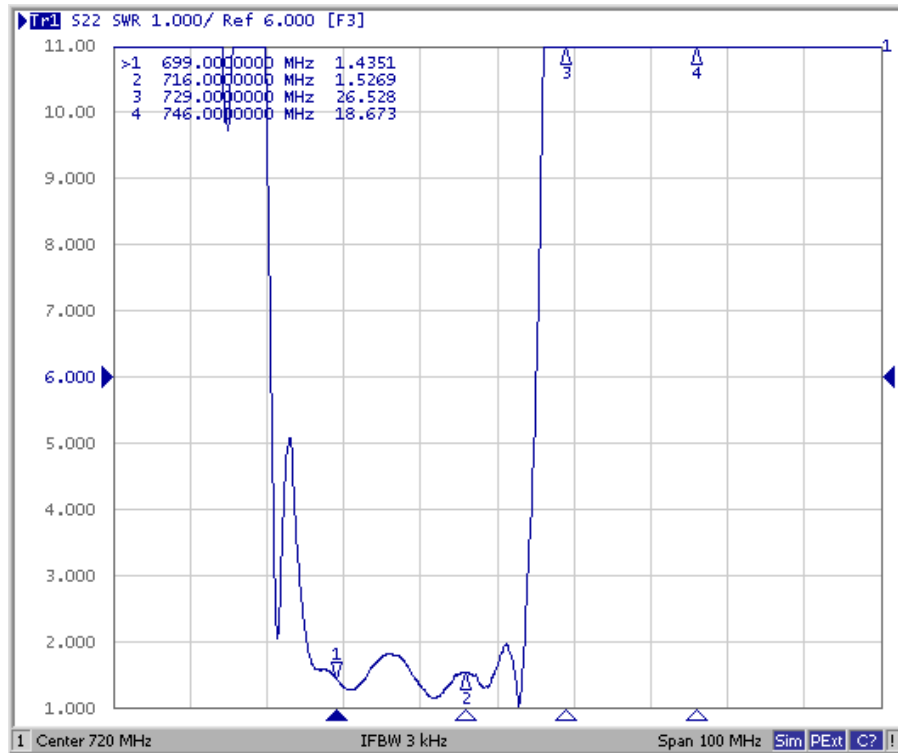


Rx Port

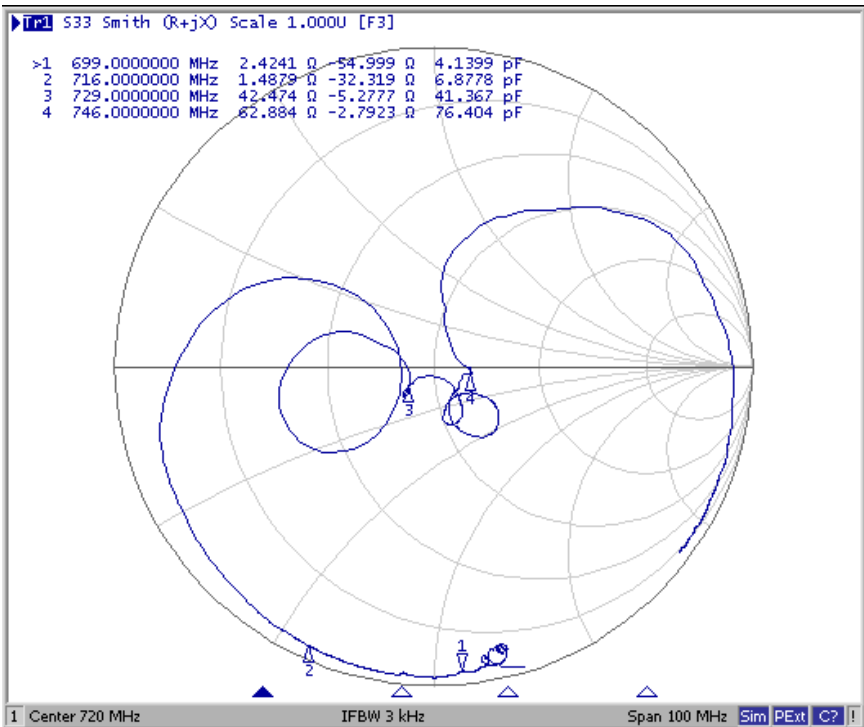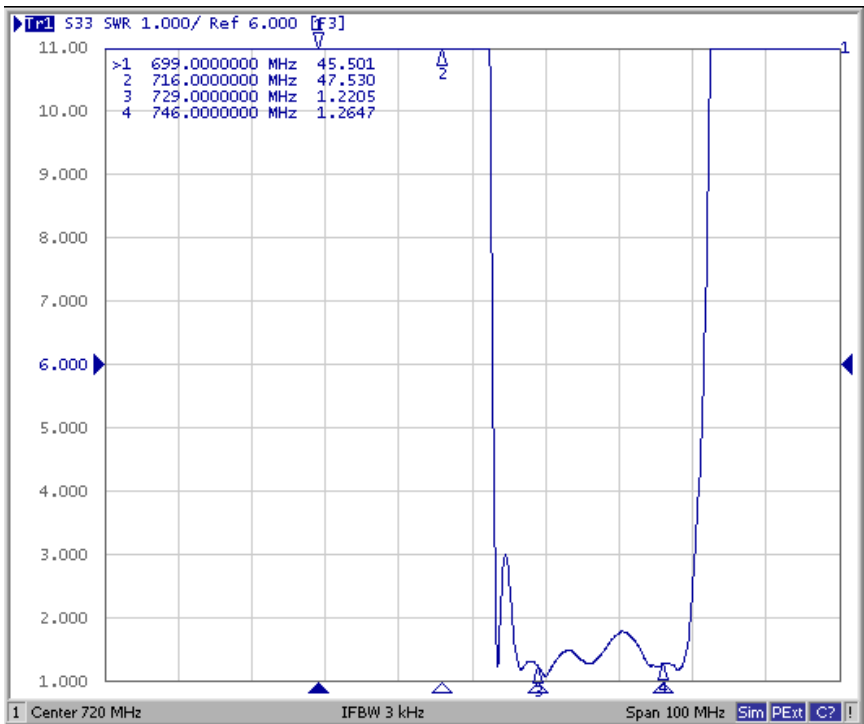


Ant Port

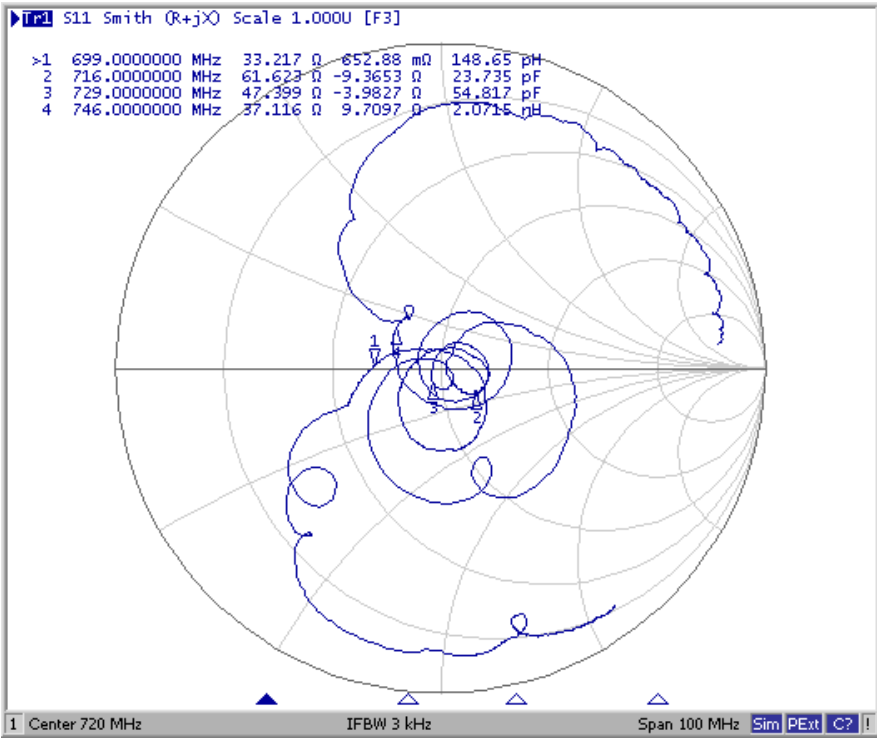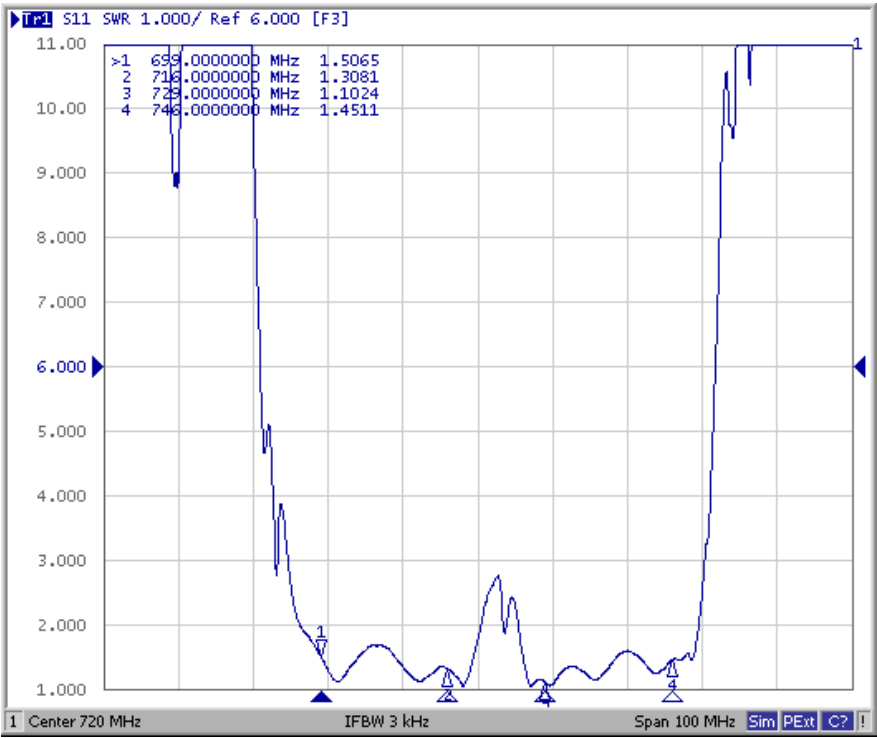


Tx to Ant (Wide Span)

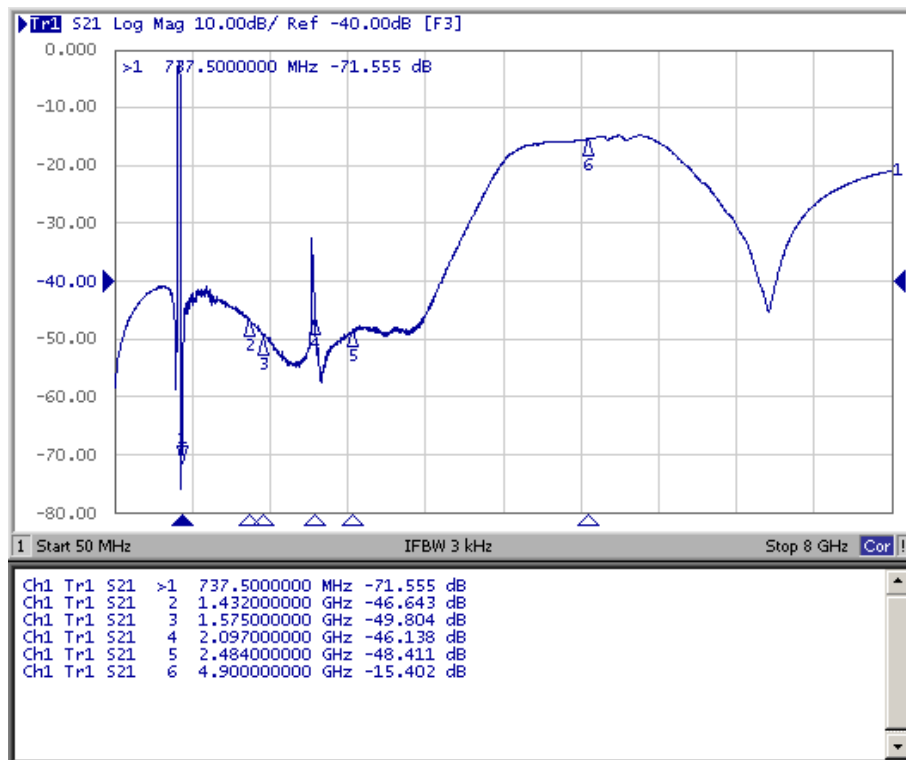

Ant to Rx (Wide Span)

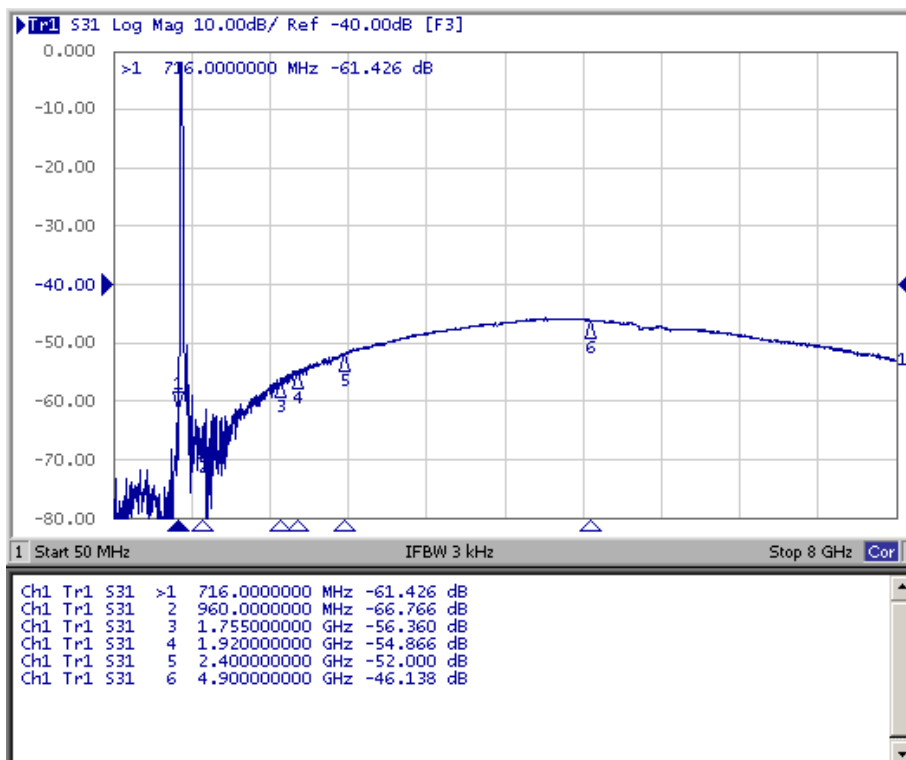

OUTLINE DRAWING (Mass Production):

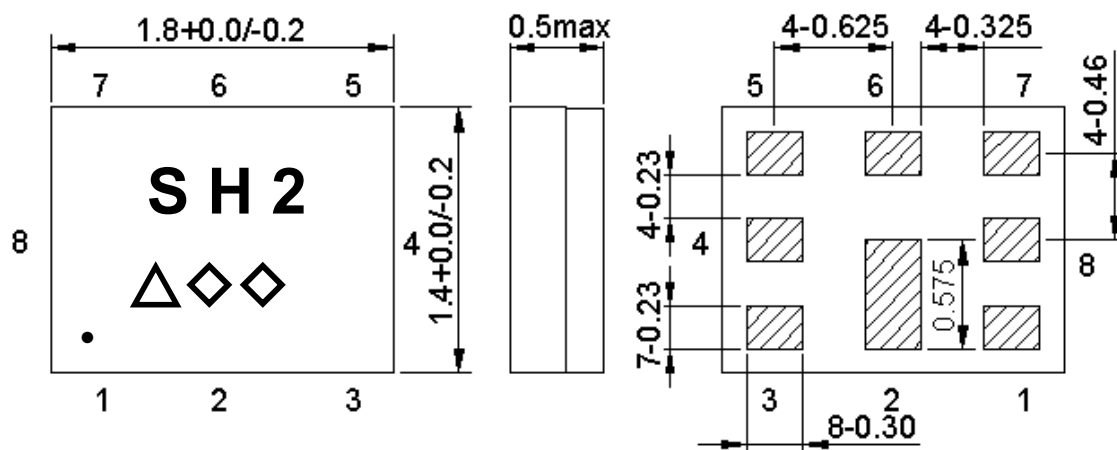

Not Specified Tolerance : ± 0.05 mm

Coplanarity : 0.1 mm max.

1 to 8 : Pin No.

Unit : mm

Marking name : **SH2**

$\triangle$: Date code(2016 May $\rightarrow$ s ,....., 2019 Dec $\rightarrow$ m.)

$\diamond\diamond$: Lot Code.


Product Date Code. Follow below table.

Year	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
2016	n	p	q	r	s	t	u	v	w	x	y	z
2017	A	B	C	D	E	F	G	H	J	K	L	M
2018	N	P	Q	R	S	T	U	V	W	X	Y	Z
2019	a	b	c	d	e	f	g	h	j	k	l	m


Pin Configuration:

Pin No.	Pin Name	Description
1	Rx	Receive Pin
2	GND	Ground Pin
3	Tx	Transmitter Pin
4	GND	Ground Pin
5	GND	Ground Pin
6	ANT	Antenna Pin
7	GND	Ground Pin
8	GND	Ground Pin

Evaluation Circuit

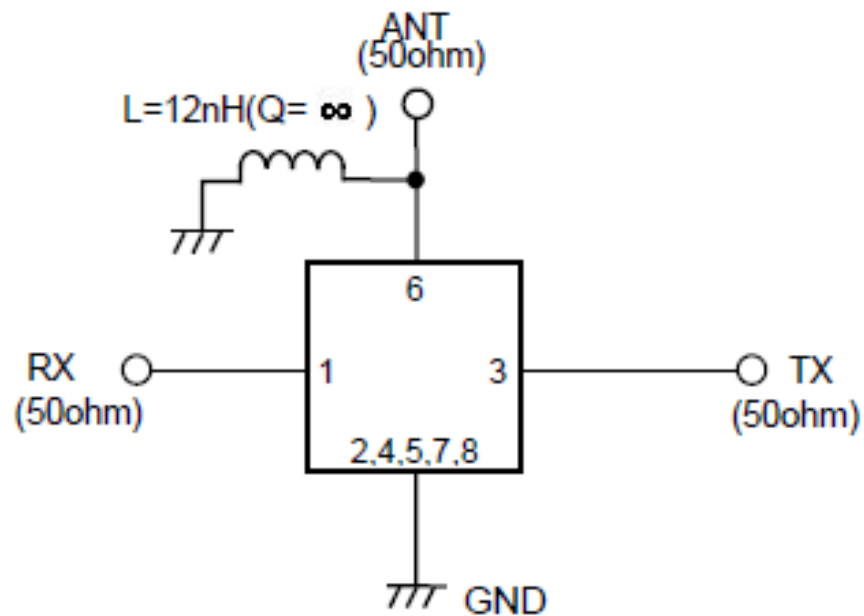

FOOTPRINT:

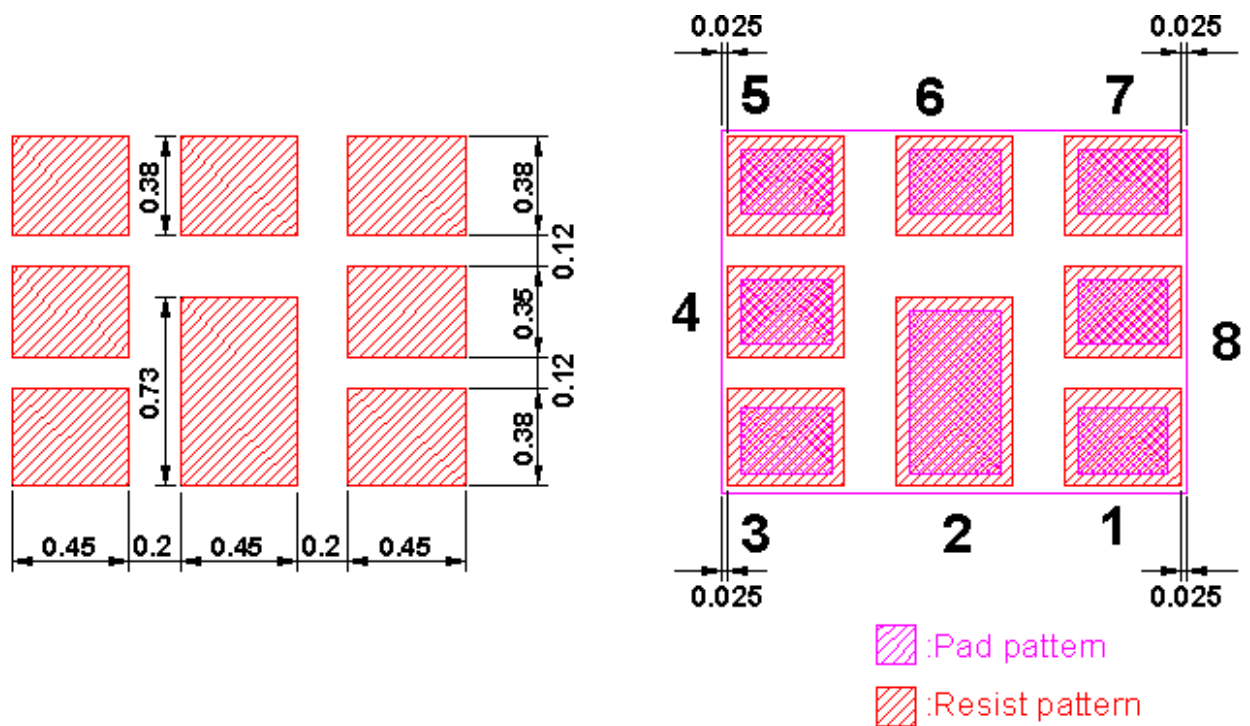


PACKING:**REEL DIMENSION**

Reel Count:

7" = 3000

13" = 10,000

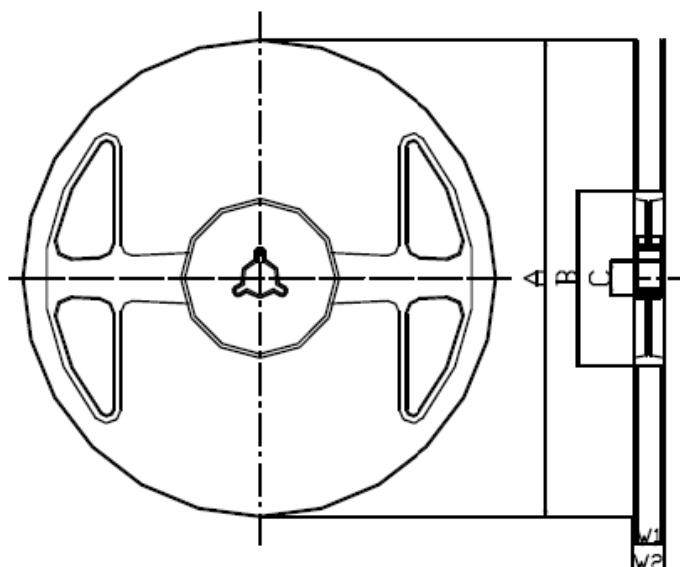**Materials of Reel**

Material : Polystyrene + Carbon


Characteristics : Conforms to EIAJ-ET-7200A

Color : Black

Surface resistance (reference value) : $10^9 \Omega/\text{sq}$ Max.

Unit : mm

Code	Quantity	A	B	C	W1	W2
Z	3,000 pcs	$\phi 180.0 +0.0/-1.5$	$\phi 66.0 +/-.0.5$	$\phi 13.0 +/-.0.2$	$9.0 +1.0/-0.0$	$11.4 +/-.1.0$

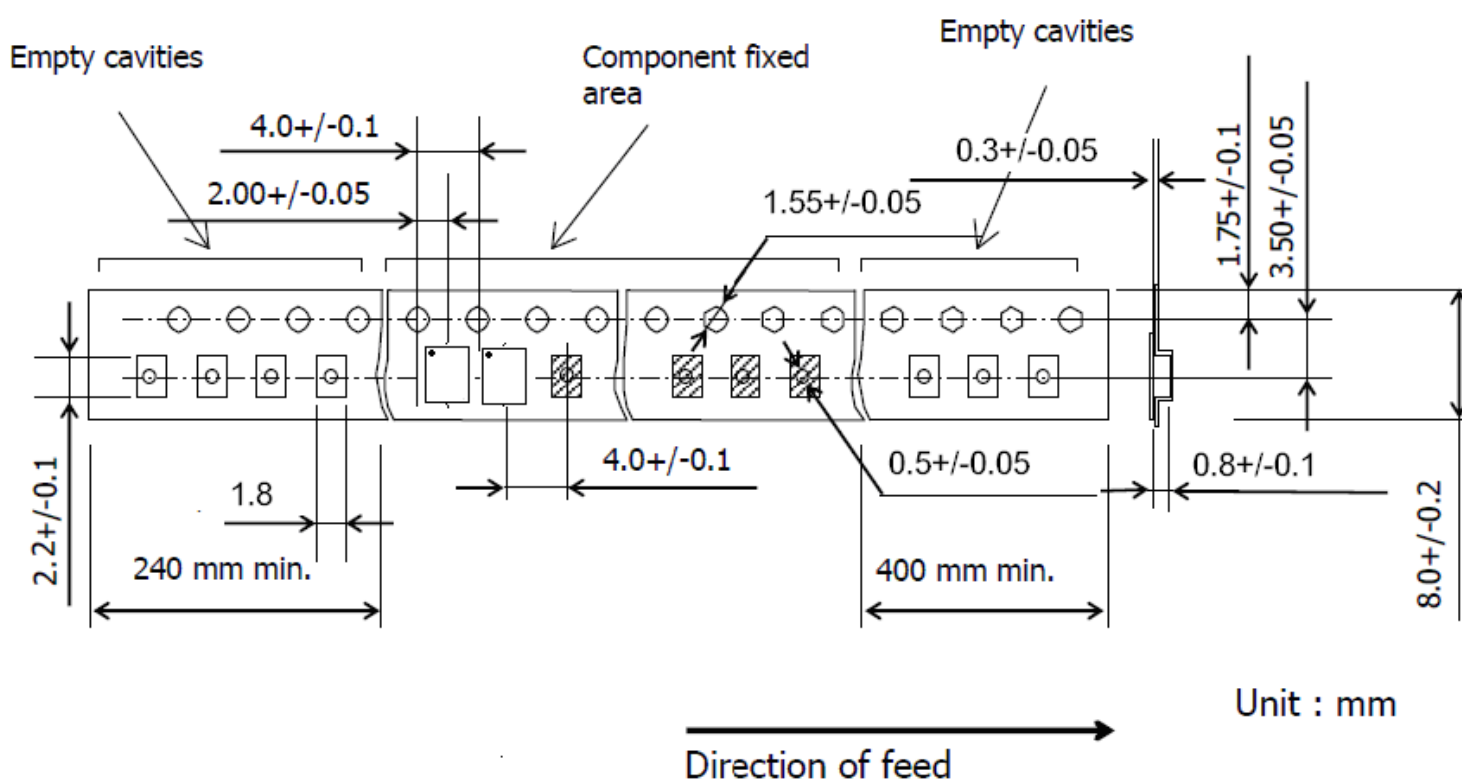TAPE DIMENSION

Unit : mm

RECOMMENDED REFLOW PROFILE :

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 245~260°C peak (min. 10sec).
4. Time : 2 times.

