



RFM Integrated Device, Inc.

PRODUCT SPECIFICATION

Part Number: XOC9011

OCXO, 30.72 MHz, ± 200 ppb
@ $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$ after turn on
power 30 ± 1 minutes

14.3x9.3x6.5mm 30.72MHz OCXO



Characteristics	Values	Unit	Note
Nominal Frequency	30.72	MHz	±200 ppb @ 25°C ±1°C after turn on power 30 ±1 minutes □ 90 days following date code

Temperature Range

Characteristics	Min.	Nom.	Max.	Unit	Note
Operating	-40		85	°C	

Power - Consumption

Characteristics	Min.	Nom.	Max.	Unit	Note
Power Supply	3.135	3.3	3.465	V	
Max values at steady state			0.6	W	at 25°C
Max values during Warm-up			600	mA	at turn on

Output Signal HCMOS

Characteristics	Min.	Nom.	Max.	Unit	Note
Level	VOH	2.4		Volt	
	VOL		0.4	Volt	
Rise/Fall time			10	ns	10% to 90%
Spurious			-60	dBc	
Duty cycle	45		55	%	
Load		15		pF	

Frequency Stability

Characteristics	Min.	Nom.	Max.	Unit	Note
VS Temperature Range			30	±ppb	-40~85°C refer to (Fmax+Fmin)/2
VS Power Supply variation			2	±ppb	±5% Change
VS Load variation			2	±ppb	±5% Change

Aging


Characteristics	Values			Unit	Note
Medium/Long Term Stability	1 day	1 Year	10 Years		After continuous operating for 1 month at 25°C
	1	100	600	±ppb	
Warm Up	10 min		10	±ppb	Refer to 1 hour on @ 25°C

Phase Noise



Characteristics	Values						Unit	Note
Static Conditions	10 Hz	100 Hz	1K Hz	10 KHz	100KHz	1M Hz		Max value
	-95	-120	-140	-145	-150	-150	dBc/Hz	

Mechanical drawing Package

MARKING THIS SURFACE

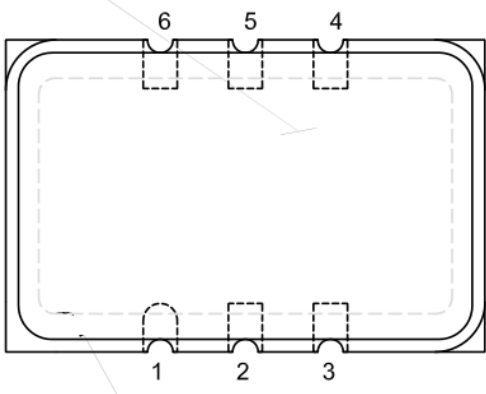

(VIEW FROM TOP)

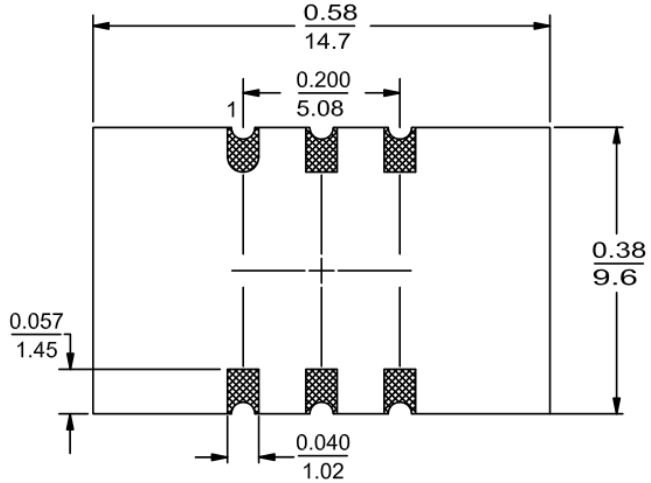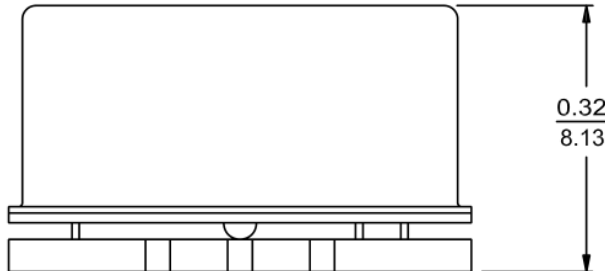

(VIEW FROM BOTTOM)

PIN CONNECTIONS	
PIN	FUNCTION
1	VCO INPUT or NOT CONNECTED
2	R.F.ENABLE or NOT CONNECTED
3	0 VOLTS AND CASE
4	R.F. OUTPUT
5	NOT CONNECTED
6	+VDC

Label (Top view)

